

parameters and specification

产品 Product		白墨烫画打印一体机 White Ink DTF printer all in one piece	
机器型号 Machine number	HP-602L		
喷头规格参数 Print specification parameters			
喷头型号Printnumber	Epson-XP600	Epson-1600	Epson-3200
喷头数量Number of Print Heads	2	2	2
打印参数Print parameters			
打印速度Printing speed	4pass:6m²/hour	4pass:8m²/hour	4pass:10m²/hour
	6pass:4m²/hour	6pass:6m²/hour	6pass:8m²/hour
	8pass:2m²/hour	8pass:4m²/hour	8pass:6m²/hour
印刷介质 Printing material			
打印材质Printed materials	热熔膜DTF film		
打印宽幅Print width	最大600mm Max.600mm		
实际印刷宽度Actual printing width	600mm		
打印机配置Printer configuration			
光栅Grating	胶条光栅Colloidal grating		
运动系统Motor system	皮带转动Belt rotation		
收放系统Delivery and feeding system	阻尼式放料系统+电动双动力收放料系统 Damping unwinding system + electric dual power retracting and unwinding system		
吸风平台Suction platform	独立智能可调吸风平台Independent intelligent adjustable suction platform		
供墨系统 Ink supply system	虹吸(正压)Siphon (positive pressure)		
墨桶容量Ink tank capacity	800ml		
操作数控系统Operating CNC System			
RIP软件 RIP Software	标配 Main Top6.1,选配 photoprint。		
数据接口 Data interface	千兆网口Gigabit Ethernet port		
电脑操作系统 Computer Operating System	windows7及以上 Windows 7 and above		
运行环境 Operating environment			
电源配置Power supply configuration	AC220V, 50Hz/60HZ		
运行环境温度 Operating ambient temperature	22-28℃		
功率Power	3800W		
产品尺寸 Product size			
机器尺寸Machine size	1190*1640*1230mm	包装尺寸Package size	1410*1250*1340mm

DTF-Business series

HP-602 L

Industrial technology tailored to individual needs

Unlimited material, everything can be hot

A1
2 HEAD



White and color



shake powder




automatic alarm



environmental protection ink



fine picture quality, high stability

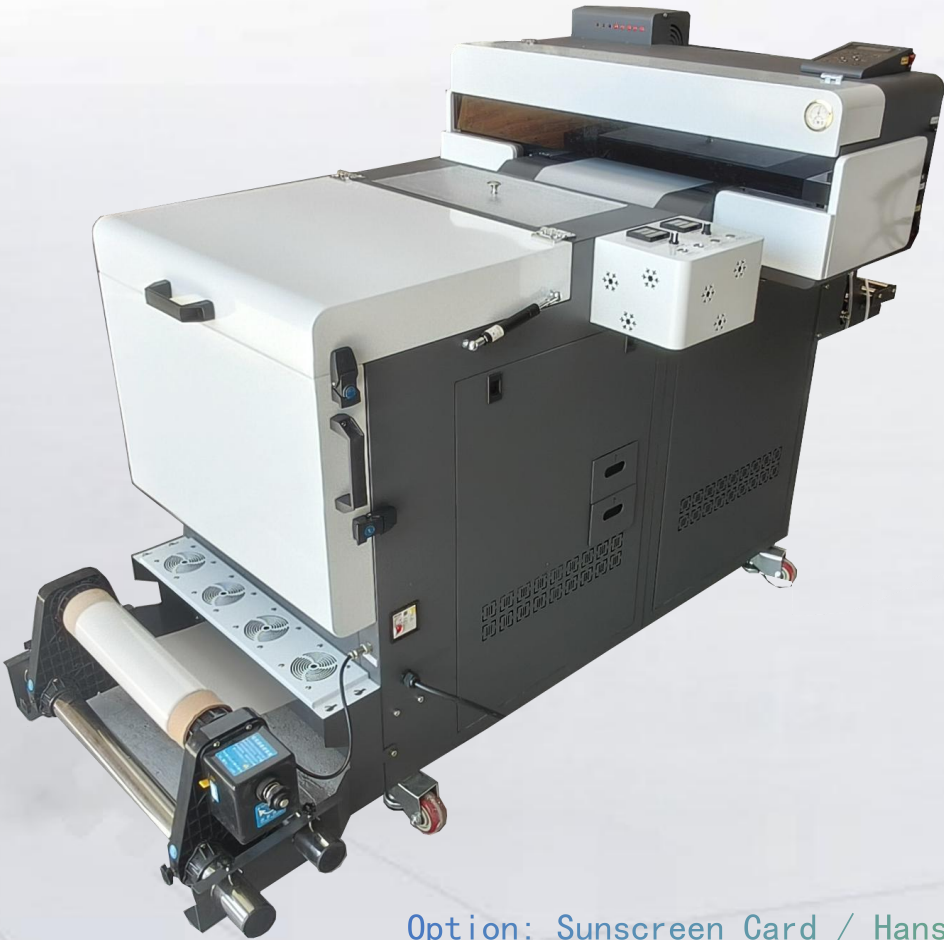

Option: Sunscreen Card / Hanson Screen Card
Option: 4 color / 6 color / 8 color

Professional digital textile printing equipment solutions

Introduction Advantags:

最大的宽度 60厘米
Print wide max 60cm



卷材送料，单次切割。可行，现在继续进行
Roll feeding, single cutting. Feasible,
continue printing now, easy for sampling



低功率/低能耗 / 商业用电 / 家庭用电
Low power / low-energy / Commercial
electricity / Household electricity



上烘+侧烘 单张 / 卷材 自由选择
Top and Side Drying | Single Sheet
/ roll Material - Free Selection



自动放料系统 步进稳定
Automatic feeding
system Steady
stepping